



## ZAF 6000



No assembly required

## SAF



20 steps required to install

# THE NEW REXNORD® ZAF STYLE ROLLER BEARINGS

- Rugged One-Piece, Solid-Base Cast Iron Housing
- Self-Aligning Spherical Roller Bearing provides  $\pm 1.5^\circ$  of both static and dynamic misalignment
- Auxiliary Cap Seals Available
- Super-Finished Raceways provide a cool running, quiet, high speed and high load capacity bearing
- Precision Milled Ends for accurate location when replacement is required
- Powder Coated Housings for superior corrosion resistance
- Prior to shipment bearings are lubricated, pre-adjusted and shaft ready which reduces installation time

## Rexnord® 6000 Series Features SHÜRLOK® adapter mount with:

### Spyglass® Optical Strain Sensor (OSS)

reduces installation errors by changing color when properly tightened to the shaft

**Positive Locking System** allows minimal vibration during operation, therefore not requiring scheduled inspections for snugness of mountings

**Adapter sleeve design** allows easy installation/removal, plus enables use of commercial grade shafts



*Bearing not properly tightened*



*Bearing properly tightened*

**Easy Installation:** Simply tighten the collar until the Spyglass® OSS shows proper indication



**Positive Locking System**


## BEARING DOWN ON YOUR APPLICATION NEEDS

### INTERCHANGEABLE SEALS

Rexnord® ZAF style solid housed Roller Bearings have three interchangeable seals to meet a wide range of application requirements.


- Field interchangeability without bearing disassembly
- Impossible to be forced out during relubrication
- Operates on hardened and ground inner ring extension
- Viton® M Seal is available for high temperature and chemical resistant applications

## SEAL TYPES:

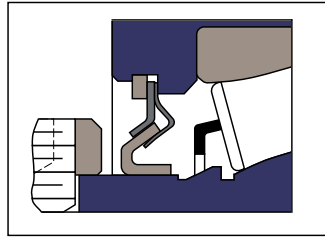


### Z Seal

- No frictional drag – generates no heat
- No speed limitations
- All metal – no temperature limitations

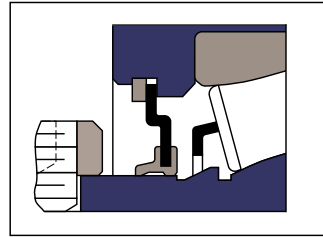

### K Seal

- Protects against contaminants
- Handles high speeds
- Less drag and heat generation than heavy contact seals

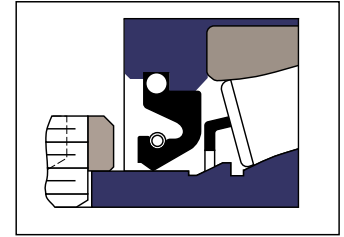

### M Seal

- Protects against liquids and grit
- Spring-loaded lip assures constant contact – even during misalignment
- Molded-in garter spring retains seal in housing
- Seals in lubricant on horizontal and vertical shafts
- Available in Viton® material (add suffix V)

## AUXILIARY CAPS – FOR SEVERE APPLICATIONS

All caps are made from cast iron and are securely bolted to the housing. They allow for a total of 3° dynamic misalignment.

- Seals against liquids and gritty contaminants
- Protects primary seal against physical damage
- Available open or closed end
  - A Prefix AZAF6207 = 2 Open Caps
  - B Prefix BZAF6207 = 1 Open (Housing Side) & 1 Closed
  - A Suffix ZAF6207A = 1 Open (Cover Side)
  - B Suffix ZAF6207B = 1 Closed (Cover Side)



*Replace 6 above with a 5 for 5000 series (e.g., AZAF6207 becomes AZAF5207)*

## The Five Point Protection Plan


The Auxiliary Cap Five Point Protection Plan is designed to protect against contamination. For maximum protection, be sure to specify heavy contact “M” seals and Auxiliary end caps.

Molded rubber V-ring seal is press-fit on shaft and rotates with it, preventing fine dirt and moisture from entering so there is no wear on the shaft.

Machined multi-grooved labyrinth seal and rugged cast iron cap provide physical protection to primary bearing seal.

Large cavity traps contaminants and moisture. The cavity can be filled with grease to provide continuous purging.

A pliable neoprene gasket supplies a positive static seal between the cap and the housing.

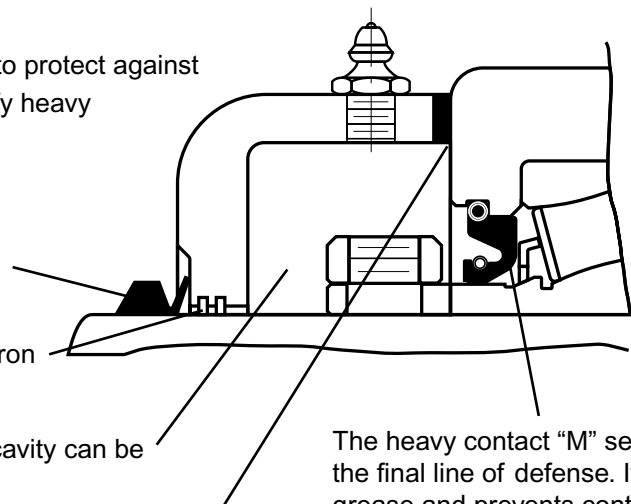

The heavy contact “M” seal provides the final line of defense. It retains grease and prevents contamination from entering and damaging the bearings.


# REXNORD® ZAF STYLE HOUSING IS THE SOLID CHOICE



## SAVE \$6,000 PER SHAFT SET!

Why use the new Rexnord® ZAF Style Roller Bearing in your next application? Because it will save you time, money, and frustration! A potential savings of more than \$6,000 per shaft set could be realized over a two year period when compared with the SAF style bearing.

## Save Time! Time = Money

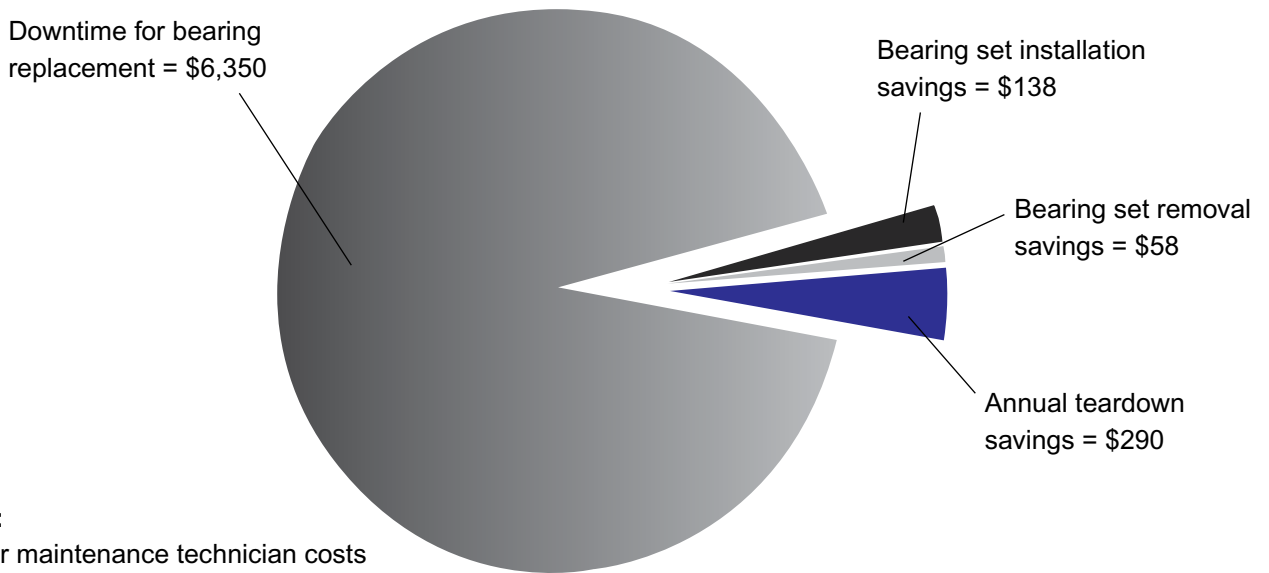

### Assumptions:

- \$50 per hour maintenance technician costs
- \$5000 per hour downtime costs


### Total savings = \$6,836

Comparison was between a Rexnord® SHÜRLOK® ZAF6207 bearing and an SAF

# REXNORD® ZAF / ZAFS PILLOW BLOCKS — 5000 SERIES

Heavy Duty 5000 Series

Double Set Collar Fixed and Floating 2 and 4 Bolt

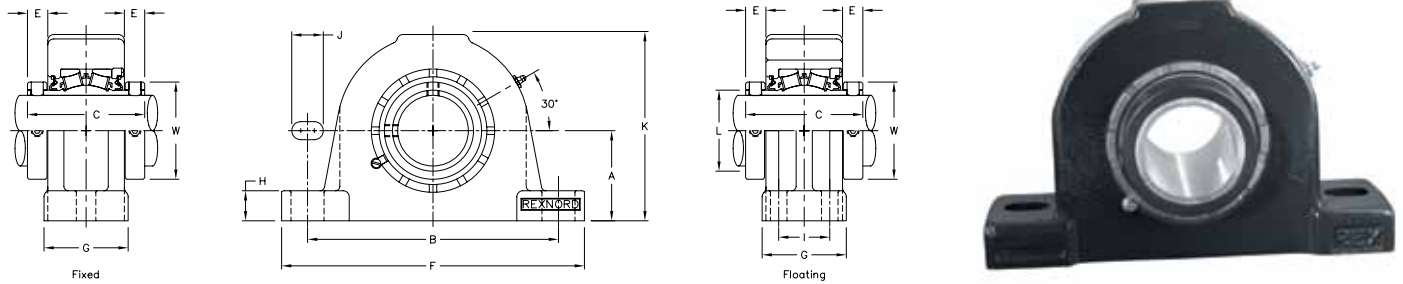

## DIMENSIONAL SPECIFICATIONS

Shaft Size	Complete Block No.		Size Code	Dimension in Inches														Bolts Req'd		Complete Block Net Wt. Blbs	
				A		B		E		F	G	H	I	J	K		W	No.	Size	Fixed	Float
				+/- .005	Min.	Max.	C	Fixed	Floating Max	+/- .0075						Fixed	Float				
1-15/16	ZAF-5115	ZAFS-5115	6	2-3/4	7-3/8	7-7/8	3-13/16	11/16	7/8	9.625	2-3/4	1	.....	15/16	5-5/16	5-5/16	2-15/16	2	5/8	16.5	20.0
2-3/16	ZAF-5203	ZAFS-5203	7	3	8-1/8	9-1/2	4-1/8	25/32	31/32	11.000	3-1/8	1	.....	1-3/8	5-31/32	5-31/32	3-1/4	2	5/8	21.0	25.5
2-7/16	ZAF-5207	ZAFS-5207	8	3-1/4	8-5/8	9-5/8	4-3/8	7/8	1-1/16	11.125	3-1/8	1-1/4	.....	1-3/16	6-25/32	6-25/32	3-9/16	2	5/8	32.5	32.5
2-7/16	ZAF-5207-F	ZAFS-5207-F	8	3-1/4	8-5/8	9-5/8	4-3/8	7/8	1-1/16	11.125	3-1/8	1-1/4	1-7/8	1-1/16	6-25/32	6-25/32	3-9/16	4	1/2	31	31.5
2-11/16	ZAF-5211	ZAFS-5211	9	3-1/2	9-7/8	11	4-7/8	7/8	1-1/8	12.594	3-1/2	1	.....	1-3/8	7-1/2	7-1/2	4-1/16	2	3/4	45.5	45
2-11/16	ZAF-5211-F	ZAFS-5211-F	9	3-1/2	9-7/8	11	4-7/8	7/8	1-1/8	12.597	3-1/2	1	2-1/8	1-1/4	7-1/2	7-1/2	4-1/16	4	5/8	44.5	44.5
2-15/16	ZAF-5215	ZAFS-5215	9	3-3/4	9-7/8	11	4-7/8	7/8	1-1/8	12.594	3-1/2	1-1/4	.....	1-3/8	7-3/4	7-3/4	4-1/16	2	3/4	45	45.5
2-15/16	ZAF-5215-F	ZAFS-5215-F	9	3-3/4	9-7/8	11	4-7/8	7/8	1-1/8	12.594	3-1/2	1-1/4	2-1/8	1-1/4	7-3/4	7-3/4	4-1/16	4	5/8	45	45.5
3-3/16	ZAF-5303	ZAFS-5303	10	4	10-3/8	11-5/8	5-5/16	15/16	1-3/16	13.750	3-7/8	1-5/8	.....	1-7/16	8-1/4	8-1/4	4-15/16	2	3/4	53.0	60.0
3-3/16	ZAF-5303F	ZAFS-5303-F	10	4	10-3/8	11-5/8	5-5/16	15/16	1-3/16	13.750	3-7/8	1-5/8	2-1/8	1-5/16	8-1/4	8-1/4	4-15/16	4	5/8	53.0	60.0
3-7/16	ZAF-5307	ZAFS-5307	10	4-1/2	11-5/8	13-1/8	5-5/16	15/16	1-3/16	15.375	4-11/32	1-21/32	.....	1-11/16	9-9/32	9-9/32	4-15/16	2	7/8	76.5	76.5
3-7/16	ZAF-5307-F	ZAFS-5307-F	10	4-1/2	11-5/8	13-1/8	5-5/16	15/16	1-3/16	15.375	4-11/32	1-21/32	2-3/8	1-9/16	9-9/32	9-9/32	4-15/16	4	3/4	75.0	75.5
3-15/16	ZAF-5315-F	ZAFS-5315-F	11	4-15/16	12-19/32	14-1/2	6-1/4	1-1/16	1-5/16	16.500	4-3/4	1-25/32	2-3/4	1-53/64	10-5/16	10-5/16	5-5/8	4	3/4	102	104
4-7/16	ZAF-5407Y-F	ZAFS-5407Y-F	12	6	14-1/2	16	6-1/4	1	1-3/8	18.375	5-1/8	2-1/16	3-1/4	1-3/4	11-7/8	11-7/8	6-3/16	4	7/8	143	144
4-15/16	ZAF-5415-F	ZAFS-5415-F	13	6	15-5/8	17-3/8	7-7/8	1-3/16	1-9/16	19.703	5-7/8	2-1/16	3-3/8	1-15/16	12-9/16	12-9/16	7-1/16	4	1	207	209
5-7/16	ZAF-5507-F	ZAFS-5507-F	14	6-11/16	17-3/8	19-1/4	8	1-7/32	1-19/32	22.000	6-1/4	2-5/8	3-3/4	2	13-7/16	13-11/16	8-3/16	4	1	233	248
5-15/16	ZAF-5515-F	ZAFS-5515-F	15	7-1/16	19-3/8	21-5/8	8-1/8	1-5/32	1-17/32	24.750	6-3/4	2-3/4	4-1/4	2-3/16	14-1/4	14-9/16	8-11/16	4	1	274	295
6	ZAF-5600-F	ZAFS-5600-F	15	7-1/16	19-3/8	21-5/8	8-1/8	1-5/32	1-17/32	24.750	6-3/4	2-3/4	4-1/4	2-3/16	14-1/4	14-9/16	8-11/16	4	1	269	290
6-7/16	ZAF-5607-F	ZAFS-5607F	16	7-1/2	20-7/8	23-5/8	8-3/4	1-9/32	1-21/32	26.750	7-1/8	3	4-5/8	2-7/16	15-5/16	15-3/4	9-3/4	4	1	337	355
6-1/2	ZAF-5608-F	ZAFS-5608F	16	7-1/2	20-7/8	23-5/8	8-3/4	1-9/32	1-21/32	26.750	7-1/8	3	4-5/8	2-7/16	15-5/16	15-3/4	9-3/4	4	1	335	353
6-15/16	ZAF-5615-F	ZAFS-5615-F	16	7-7/8	21-5/8	24-3/8	8-3/4	1-9/32	1-21/32	28.000	7-1/2	3-1/8	4-1/2	2-11/16	15-11/16	16-1/8	9-3/4	4	1-1/4	347	376
7	ZAF-5700-F	ZAFS-5700-F	16	7-7/8	21-5/8	24-3/8	8-3/4	1-9/32	1-21/32	28.000	7-1/2	3-1/8	4-1/2	2-11/16	15-11/16	16-1/8	9-3/4	4	1-1/4	345	372


**NOTE:** Dimensions subject to change. Certified dimensions of ordered material furnished on request.

4-Bolt block - use suffix F, Bore Size = Nominal Shaft Size +.001 - .000 / Expansion - Size Codes 4-8 is 3/8", Size Codes 9-11 is 1/2", Size codes 12-13 is 3/4", Seals - To Specify K or M seal, replace "Z" in model number with "K" or "M" "K" only available size code 6-11, Auxiliary Caps available all sizes

# REXNORD® ZAF / ZAFS PILLOW BLOCKS — 6000 SERIES

Heavy Duty 6000 Series

Rexnord Shurlok® Adapter Mount Fixed and Floating 2 and 4 Bolt

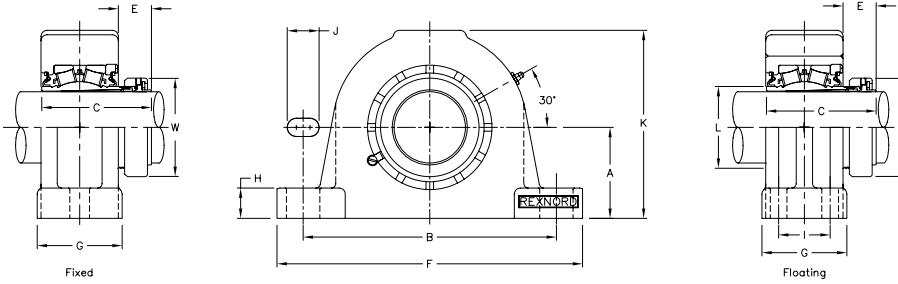

## DIMENSIONAL SPECIFICATIONS

Size Inches	Complete Block No.		Size Code	Dimension in Inches													Bolts Req'd No.	Size	Complete Block Net Wt. Lbs.	
	Fixed	Floating		A +/- .005	B		C	E	F +/- .0075	G	H	I	J	K		W			Fixed	Float
					MIN.	MAX.								Fixed	Float					
1-15/16	ZAF-6115	ZAFS-6115	6	2-3/4	7-3/8	7-7/8	3-41/64	1-1/8	9.625	2-3/4	1	.....	15/16	5-5/16	5-5/16	2-55/64	2	5/8	16.5	20.0
2-3/16	ZAF-6203	ZAFS-6203	7	3	8-1/8	9-1/2	3-49/64	1-5/32	11.000	3-1/8	1	.....	1-3/8	5-31/32	5-31/32	3-15/64	2	5/8	21.0	25.5
2-7/16	ZAF-6207	ZAFS-6207	8	3-1/4	8-5/8	9-5/8	4-5/32	1-27/64	11.125	3-1/8	1-1/4	.....	1-3/16	6-25/32	6-25/32	3-19/32	2	5/8	32.5	32.5
2-7/16	ZAF-6207-F	ZAFS-6207-F	8	3-1/4	8-5/8	9-5/8	4-5/32	1-27/64	11.125	3-1/8	1-1/4	1-7/8	1-1/16	6-25/32	6-25/32	3-19/32	4	1/2	31	31.5
2-11/16	ZAF-6211	ZAFS-6211	9	3-1/2	9-7/8	11	4-17/32	1-25/64	12.594	3-1/2	1	.....	1-3/8	7-1/2	7-1/2	4-3/32	2	3/4	45.5	45
2-11/16	ZAF-6211-F	ZAFS-6211-F	9	3-1/2	3-1/2	11	4-17/32	1-25/64	12.594	3-1/2	1	2-1/8	1-1/4	7-1/2	7-1/2	4-3/32	4	5/8	44.5	44.5
2-15/16	ZAF-6215	ZAFS-6215	9	3-3/4	9-7/8	11	4-17/32	1-25/64	12.594	3-1/2	1-1/4	.....	1-3/8	7-3/4	7-3/4	4-3/32	2	3/4	45	45.5
2-15/16	ZAF-6215-F	ZAFS-6215-F	9	3-3/4	9-7/8	11	4-17/32	1-25/64	12.594	3-1/2	1-1/4	2-1/8	1-1/4	7-3/4	7-3/4	4-3/32	4	5/8	45	45.5
3-3/16	ZAF-6303	ZAFS-6303	10	4	10-3/8	11-5/8	5-9/64	1-19/32	13.750	3-7/8	1-5/8	.....	1-7/16	8-1/4	8-1/4	4-61/64	2	3/4	52.0	59.0
3-3/16	ZAF-6303-F	ZAFS-6303-F	10	4	10-3/8	11-5/8	5-9/64	1-19/32	13.750	3-7/8	1-5/8	2-1/8	1-5/16	8-1/4	8-1/4	4-61/64	4	5/8	52.0	59.0
3-7/16	ZAF-6307	ZAFS-6307	10	4-1/2	11-5/8	13-1/8	5-9/64	1-19/32	15.375	4-11/32	1-21/32	.....	1-11/16	9-9/32	9-9/32	4-61/64	2	7/8	76.5	76.5
3-7/16	ZAF-6307-F	ZAFS-6307-F	10	4-1/2	11-5/8	13-1/8	5-9/64	1-19/32	15.375	4-11/32	1-21/32	2-3/8	1-9/16	9-9/32	9-9/32	4-61/64	4	3/4	75.0	75.5
3-15/16	ZAF-6315-F	ZAFS-6315-F	11	4-15/16	12-19/32	14-1/2	5-31-32	1-47/64	16.500	4-3/4	1-25/32	2-3/4	1-53/64	10-5/16	10-5/16	5-43/64	4	3/4	102	104
4-7/16	ZAF-6407Y-F	ZAFS-6407Y-F	12	6	14-1/2	16	6-1/4	1-7/8	18.375	5-1/8	2-1/16	3-1/4	1-3/4	11-7/8	11-7/8	6-1/16	4	7/8	143	144
4-15/16	ZAF-6415-F	ZAFS-6415-F	13	6	15-5/8	17-3/8	7-15/16	2-1/4	19.703	5-7/8	2-1/16	3-3/8	1-15/16	12-9/16	12-9/16	6-61/64	4	1	207	209

**NOTE:** Dimensions subject to change. Certified dimensions of ordered material furnished on request.

4-Bolt block - Use Suffix F, Bore Size=Nominal Shaft Size +.001 - .000 / Expansion - Size Codes 6-8 is 3/8", Size Codes 9-11 is 1/2", Size codes 12-16 is 3/4", Seals - To Specify K or M seal, replace "Z" in model number with "K" or "M". "K" only available size codes 6-11, Auxiliary Caps available all sizes

# REXNORD® ZAF / ZAFS PILLOW BLOCKS — 5000 SERIES

Heavy Duty 5000 Series

Double Set Collar Fixed and Floating 2 and 4 Bolt



# REXNORD® ZAF / ZAFS PILLOW BLOCKS — 6000 SERIES

Heavy Duty 6000 Series

Rexnord Shürlok® Adapter Mount Fixed and Floating 2 and 4 Bolt



## ZAF INTERCHANGE

Shaft Size Inches	No. of Bolts	Rexnord 5000 Series Part #		Rexnord 6000 Series Part #		DODGE TAF Series Part #		DODGE USAF Series Part #		DODGE ISAF Series Part #		SKF SAF Series Part #	
		Fixed	Expansion	Fixed	Expansion	Fixed	Expansion	Fixed	Expansion	Fixed	Expansion	Fixed	Expansion
1-15/16	2	ZAF-5115	ZAFS-5115	ZAF-6115	ZAFS-6115	P2B511-TAF-115R	P2B511-TAF-115RE	P2B511-USAF-115R	P2B511-USAF-115RE	P2B511-ISAF-115R	P2B511-ISAF-115RE	SAF22511	SAF22511
2-3/16	2	ZAF-5203	ZAFS-5203	ZAF-6203	ZAFS-6203	P2B513-TAF-203R	P2B513-TAF-203RE	P2B513-USAF-203R	P2B513-USAF-203RE	P2B513-ISAF-203R	P2B513-ISAF-203RE	SAF22513	SAF22513
2-7/16	2	ZAF-5207	ZAFS-5207	ZAF-6207	ZAFS-6207	P2B515-TAF-207R	P2B515-TAF-207RE	P2B515-USAF-207R	P2B515-USAF-207RE	P2B515-ISAF-207R	P2B515-ISAF-207RE	SAF22515	SAF22515
2-7/16	4	ZAF-5207-F	ZAFS-5207-F	ZAF-6207-F	ZAFS-6207-F	P4B515-TAF-207R	P4B515-TAF-207RE	P4B515-USAF-207R	P4B515-USAF-207RE	P4B515-ISAF-207R	P4B515-ISAF-207RE	FSAF22515	FSAF22515
2-11/16	2	ZAF-5211	ZAFS-5211	ZAF-6211	ZAFS-6211	P2B516-TAF-211R	P2B516-TAF-211RE	P2B516-USAF-211R	P2B516-USAF-211RE	P2B516-ISAF-211R	P2B516-ISAF-211RE	SAF22516	SAF22516
2-11/16	4	ZAF-5211-F	ZAFS-5211-F	ZAF-6211-F	ZAFS-6211-F	P4B516-TAF-211R	P4B516-TAF-211RE	P4B516-USAF-211R	P4B516-USAF-211RE	P4B516-ISAF-211R	P4B516-ISAF-211RE	FSAF22516	FSAF22516
2-15/16	2	ZAF-5215	ZAFS-5215	ZAF-6215	ZAFS-6215	P2B517-TAF-215R	P2B517-TAF-215RE	P2B517-USAF-215R	P2B517-USAF-215RE	P2B517-ISAF-215R	P2B517-ISAF-215RE	SAF22517	SAF22517
2-15/16	4	ZAF-5215-F	ZAFS-5215-F	ZAF-6215-F	ZAFS-6215-F	P4B517-TAF-215R	P4B517-TAF-215RE	P4B517-USAF-215R	P4B517-USAF-215RE	P4B517-ISAF-215R	P4B517-ISAF-215RE	FSAF22517	FSAF22517
3-3/16	2	ZAF-5303	ZAFS-5303	ZAF-6303	ZAFS-6303	-	-	P2B518-USAF-303R	P2B518-USAF-303RE	-	-	SAF22518	SAF22518
3-3/16	4	ZAF-5303-F	ZAFS-5303-F	ZAF-6303-F	ZAFS-6303-F	-	-	P4B518-USAF-303R	P4B518-USAF-303RE	-	-	FSAF22518	FSAF22518
3-7/16	2	ZAF-5307	ZAFS-5307	ZAF-6307	ZAFS-6307	P2B520-TAF-307R	P2B520-TAF-307RE	P2B520-USAF-307R	P2B520-USAF-307RE	P2B520-ISAF-307R	P2B520-ISAF-307RE	SAF22520	SAF22520
3-7/16	4	ZAF-5307-F	ZAFS-5307-F	ZAF-6307-F	ZAFS-6307-F	P4B520-TAF-307R	P4B520-TAF-307RE	P4B520-USAF-307R	P4B520-USAF-307RE	P4B520-ISAF-307R	P4B520-ISAF-307RE	FSAF22520	FSAF22520
3-15/16	4	ZAF-5315-F	ZAFS-5315-F	ZAF-6315-F	ZAFS-6315-F	P4B522-TAF-315R	P4B522-TAF-315RE	P4B522-USAF-315R	P4B522-USAF-315RE	P4B522-ISAF-315R	P4B522-ISAF-315RE	SAF22522	SAF22522
4-7/16	4	ZAF-5407Y-F	ZAFS-5407Y-F	ZAF-6407Y-F	ZAFS-6407Y-F	P4B526-TAF-407R	P4B526-TAF-407RE	P4B526-USAF-407R	P4B526-USAF-407RE	P4B526-ISAF-407R	P4B526-ISAF-407RE	SAF22526	SAF22526
4-15/16	4	ZAF-5415-F	ZAFS-5415-F	ZAF-6415-F	ZAFS-6415-F	P4B528-TAF-415R	P4B528-TAF-415RE	P4B528-USAF-415R	P4B528-USAF-415RE	P4B528-ISAF-415R	P4B528-ISAF-415RE	SAF22528	SAF22528
5-7/16	4	ZAF-5507-F	ZAFS-5507-F	-	-	P4B532-TAF-507R	P4B532-TAF-507RE	P4B532-USAF-507R	P4B532-USAF-507RE	P4B532-ISAF-507R	P4B532-ISAF-507RE	SAF22532	SAF22532
5-15/16	4	ZAF-5515-F	ZAFS-5515-F	-	-	P4B534-TAF-515R	P4B534-TAF-515RE	P4B534-USAF-515R	P4B534-USAF-515RE	P4B534-ISAF-515R	P4B534-ISAF-515RE	SAF22534	SAF22534
6	4	ZAF-5600-F	ZAFS-5600-F	-	-	P4B534-TAF-600R	P4B534-TAF-600RE	P4B534-USAF-600R	P4B534-USAF-600RE	P4B534-ISAF-600R	P4B534-ISAF-600RE	SAF22534	SAF22534
6-7/16	4	ZAF-5607-F	ZAFS-5607-F	-	-	P4B536-TAF-607R	P4B536-TAF-607RE	P4B536-USAF-607R	P4B536-USAF-607RE	P4B536-ISAF-607R	P4B536-ISAF-607RE	SAF22536	SAF22536
6-1/2	4	ZAF-5608-F	ZAFS-5608-F	-	-	P4B536-TAF-608R	P4B536-TAF-608RE	P4B536-USAF-608R	P4B536-USAF-608RE	P4B536-ISAF-608R	P4B536-ISAF-608RE	SAF22536	SAF22536
6-15/16	4	ZAF-5615-F	ZAFS-5615-F	-	-	P4B538-TAF-615R	P4B538-TAF-615RE	P4B538-USAF-615R	P4B538-USAF-615RE	P4B538-ISAF-615R	P4B538-ISAF-615RE	SAF22538	SAF22538
7	4	ZAF-5700-F	ZAFS-5700-F	-	-	P4B538-TAF-700R	P4B538-TAF-700RE	P4B538-USAF-700R	P4B538-USAF-700RE	P4B538-ISAF-700R	P4B538-ISAF-700RE	SAF22538	SAF22538

# World Class Customer Service

For more than 100 years, the dedicated people of Rexnord have delivered excellence in quality and service to our customers around the globe. Rexnord is a trusted name when it comes to providing skillfully engineered products that improve productivity and efficiency for industrial applications worldwide. We are committed to exceeding customer expectations in every area of our business: product design, application engineering, operations, and customer service.

Because of our customer focus, we are able to thoroughly understand the needs of your business and have the resources available to work closely with you to reduce maintenance costs, eliminate redundant inventories and prevent equipment down time.

Rexnord represents the most comprehensive portfolio of power transmission and conveying components in the world with the brands you know and trust.

Rexnord, SHURLOK and Spyglass are registered trademarks of Rexnord Industries, LLC. Viton is a registered trademarks of DuPont Performance Elastomer



## WORLDWIDE CUSTOMER SERVICE

### AUSTRALIA

Rexnord Australia Pty. Ltd.  
Picton, New South Wales  
Phone: 61-2-4677-3811  
Fax: 61-2-4677-3812

Falk-Rexnord Australia Pty Ltd  
Broadmeadow New South Wales  
Phone: 61-2-4962-8000  
Fax: 61-2-4962-8001

### BRAZIL

Rexnord Correntes Ltda.  
Sao Leopoldo - RS  
Phone: 55-51-579-8022  
Fax: 55-51-579-8029

### CANADA

Rexnord Canada Ltd.  
Scarborough, Ontario  
Phone: 1-416-297-6868  
Fax: 1-416-297-6873

### CHINA

Rexnord China  
Shanghai, China  
Phone: 86-21-62701942  
Fax: 86-21-62701943

### EUROPE

Rexnord NV  
Mechelen, Belgium  
Phone: 32-15-443881  
Fax: 32-15-443860

### LATIN AMERICA

Rexnord International Inc.  
Milwaukee, Wisconsin  
Phone: 1-414-643-2366  
Fax: 1-414-643-3222  
E-mail: international1@rexnord.com

### MEXICO

Rexnord S. A. De C. V.  
Mexico DF, Mexico  
Phone: 52-55-9140-3500  
Fax: 52-55-9140-3550

### SINGAPORE

Rexnord International, Inc.  
Singapore City, Singapore  
Phone: 65-6338-5622  
Fax: 65-6338-5422

### UNITED STATES

Customer Service  
Phone: 866-Rexnord  
(866-739-6673)  
E-mail: rexnordcs(state)@rexnord.com  
Example: rexnordcsohio@rexnord.com

### ALL COUNTRIES NOT LISTED ABOVE

Rexnord International Inc.  
Milwaukee, Wisconsin  
Phone: 1-414-643-2366  
Fax: 1-414-643-3222  
E-mail: international2@rexnord.com

